



intelligent motion systems, inc.
Excellence in Motion™

MX-CC100-000

INTEGRATED RS-232 COMMUNICATIONS CABLE

QUICK REFERENCE




370 N. MAIN ST., PO BOX 457, MARLBOROUGH, CT 06447
PH: (860) 295-6102, FAX: (860) 295-6107
Internet: www.imshome.com, E-Mail: info@imshome.com

MX-CC100-000 RS-232 Communications Cable

The MX-CC100-000 Communications Cable is an in-line RS-232 interface utilizing a DB-9F PC serial plug and a 10 Pin IDC mating connector. This product is used to communicate to a single MicroLYNX unit. The convenience of the RS-232 interface allows the MicroLYNX to be connected to a standard 9 pin serial port on a PC.

Cable Detail

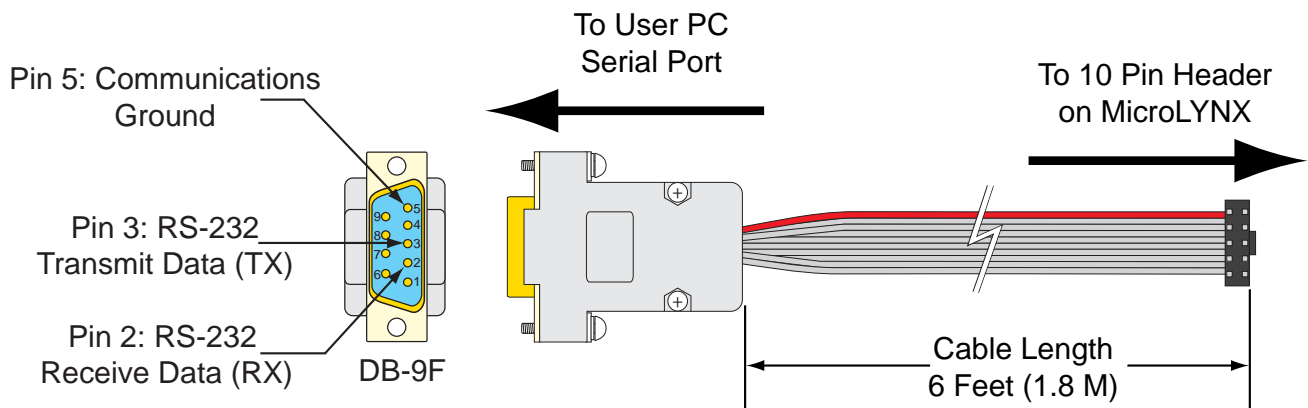

Electrical Specifications

| MX-CC100-000 Specifications | |
|-----------------------------|---------------------|
| BAUD Rate | Up to 38.4 kbps |
| Connectors: | |
| RS-232 End | DB-9F |
| MicroLYNX End | 10 Pin 2mm IDC |
| Ribbon Cable Length | 6 feet (1.8 meters) |

Typical MX-CC100-000 RS-232 Interface

