


MDrive[®] Plus

Stepper motors with integrated electronics



MDrive 34 Plus Motion Control
fully programmable

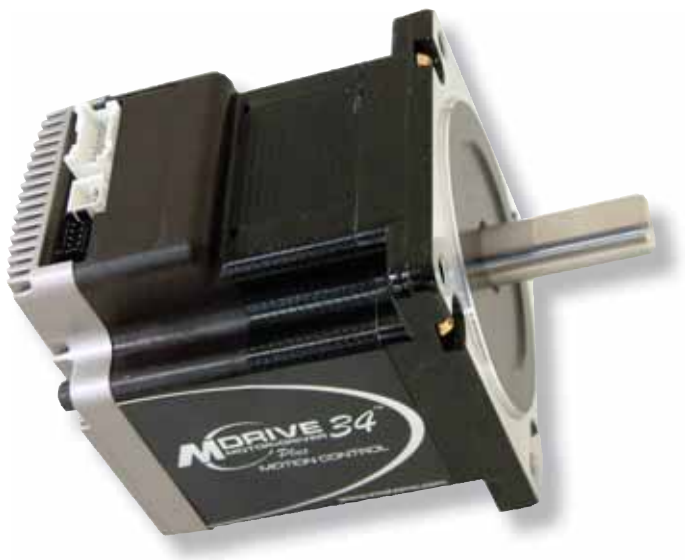

MDrive® Plus Motion Control, fully programmable

Presentation

The MDrive® Plus Motion Control is a 1.8° 2-phase stepper motor with on-board fully programmable motion controller, drive electronics and optional encoder. This means MDrive Plus Motion Control products are stand-alone motion control solutions that can be used without any external controller.

MDrive products come standard with RS-422/485 serial interface. Programming is with MCode, simple 1 to 2 character instructions, using the IMS Terminal software tool.

Size 23 MDrive products are also available for Modbus/TCP protocol. Programming is with the same MCode instruction set used for the RS-422/485 products. Modbus/TCP products support the application protocol per specification Version 1.1b, with operation in immediate mode, not as programmable products.

MDrive Plus Motion Control products may be equipped with encoders for stall detection, position maintenance and find index mark.

Application areas

The MDrive Plus Motion Control is ideal for machine builders who want an optimized motor with on-board electronics. The integrated electronics of the fully programmable MDrive Plus Motion Control reduces the potential for problems due to electrical noise by eliminating the cable between motor and drive.

These compact, powerful and cost effective motion control solutions deliver unsurpassed smoothness and performance that will reduce system cost, design and assembly time for a large range of 2-phase stepper motor applications.

Features

Standard Plus

- Highly integrated microstepping drive and high torque 1.8° 2-phase stepper motor
- Advanced current control for exceptional performance and smoothness
- Single supply: from +12 up to +75 VDC or 120 and 240 VAC
- Cost effective
- Extremely compact
- 20 microstep resolutions to 51,200 steps/rev including: Degrees, Metric, Arc Minutes
- Auxiliary logic power supply input
- Open or optional closed loop control
- Programmable motor run and hold currents
- Four +5 to +24 VDC I/O lines accept sinking outputs, or sourcing and sinking inputs
- One 10 bit analog input selectable: 0 to +10 VDC, 0 to +5 VDC, 0-20 mA, 4-20 mA
- 0 to 5 MHz step clock rate selectable in 0.59 Hz increments
- RS-422/485 or Modbus/TCP communication protocols (1)
- 62 software addresses for multi-drop communications (2)
- Simple 1 to 2 character instructions
- Available options:
 - Long life linear actuators (3)
 - Hybrid Motion Technology™ (3)
 - Encoders
 - Control knob for manual positioning
 - Industrial connectors with IP54 rating (4)
- Several motor stack lengths available
- Graphical user interface provided for quick and easy configuration and programming

Expanded Plus²

- +24 VDC tolerant I/O sourcing or sinking, inputs and outputs with up to 8 I/O lines and electronic gearing
- Closed loop control available with external / remote encoder option
- High speed position capture input or trip output

(1) Modbus/TCP only available for MDrive23 products.

(2) Only with RS-422/485 products.

(3) See separate documentation.

(4) Industrial connectors are unavailable for MDrive14 or MDrive34 products.

MDrive[®] Plus

Motion Control

fully programmable

Standard Plus specifications

		MDrive 14	MDrive 17	MDrive 23 (1)	MDrive 23 (1)	MDrive 34	MDrive 34ac (2)	
Input power	Voltage	VDC	12 to 48	12 to 48	12 to 75	12 to 60	12 to 75	
		VAC	—	—	—	—	120	240
	Current maximum (3)	1A	2A	2A	3.5A	4A	95 to 132 VAC @ 50/60 Hz	95 to 264 VAC @ 50/60 Hz
Thermal	Operating temp non-condensing	Heat sink	-40° to +85°C				-40° to +75°C	
		Motor	-40° to +100°C				-40° to +90°C	
Protection	Type	not applicable					- Thermal - Over voltage/current	

Aux. logic input voltage	Range	+12 to +24 VDC <i>When input voltage is removed, maintains power only to control and feedback circuits. (4)</i>							
Analog input	Resolution	10 bit							
	Voltage range	0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA							
General purpose I/O	Number	4							
	Type	sourcing or sinking inputs, or sinking outputs							
	Logic range	Inputs and outputs tolerant to +24 VDC, inputs TTL level compatible							
	Output sink current	Up to 600 mA							
	Protection	Over temp, short circuit, transient over voltage, inductive clamp							
Communication	Type	RS-422/485							
	Baud rate	4.8 to 115.2 kbps							
Motion	Open loop configuration	Number of settings	20						
		Steps per revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)						
	Closed loop configuration (requires encoder option)	Encoder resolution	512 lines/2048 edges per rev						
		Counters	Type	position, encoder/32 bit					
	Velocity	Edge rate maximum	5 MHz						
		Range	+/- 5,000,000 steps per second						
	Accel/Decel	Resolution	0.5961 steps per second						
		Range	1.5 x 10 ⁹ steps per second ²						
	Software	Program storage	Type/size	flash/6384 bytes					
			User registers	Four 32 bit					
User program labels & variables		192							
Math functions		+, -, ×, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT							
Branch functions		Branch and Call							
General purpose I/O functions		Inputs	home, limit plus, limit minus, go, stop, pause, jog plus, jog minus, general purpose						
		Outputs	moving, fault, stall, velocity change, general purpose						
Trip functions		Trip on input, trip on position, trip on time, trip capture, trip on relative position							
Party mode addresses		62 (4)							
Encoder functions	Stall detection, position maintenance, find index								

Expanded Plus² specifications

General purpose I/O	Number	8 (or 4 with either remote encoder option or Modbus/TCP protocol)					
	Type	sourcing or sinking outputs/inputs					
	Logic range	Sourcing outputs +12 to +24 VDC, inputs and sinking outputs tolerant to +24 VDC, inputs TTL level compatible					
	Output sinking current	Up to 600 mA					
Communication	Type	RS-422/485 or Modbus/TCP (5)					
Motion	Electronic gearing	Range/resolution/ threshold – external clock in (6)		0.001 to 2.000/32 bit/TTL			
		Input filter range		50 nS to 12.9 μS (10 MHz to 38.8 kHz)			
		Range – secondary clock out (6)		1 to 1			
	High speed I/O	Position capture	Input filter range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)			
			Resolution	32 bit			
		Trip output – speed/resolution/threshold	150 nS/32 bit/TTL				
	Closed loop configuration (requires remote encoder)	Steps per revolution		Same as Standard Plus specification shown in section above			
		Encoder type		User-supplied differential encoder			
Encoder resolution		User-defined					

(1) Only quad stack NEMA 23 motors have +12 to +60 VDC drives, all other NEMA 23 motors have +12 to +75 VDC drives.

(2) Only available as Plus² products.


(3) Actual power supply current will depend on voltage and load.

(4) Not available with Modbus/TCP products.

(5) Modbus/TCP only available with MDrive23 Plus² products.

(6) Adjusting the microstep resolution can increase the range.


– Plus & Plus² – mechanical specifications, dimensions in inches (mm)

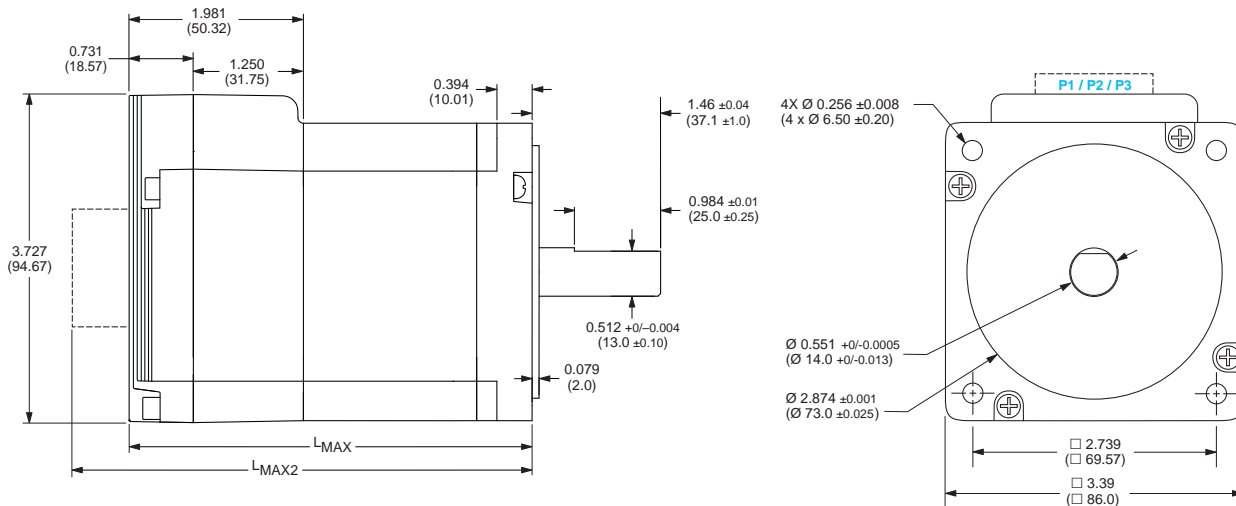

Motor stack length	Lmax (1)	Lmax2 (2)
Single	3.81 (96.77)	4.52 (114.81)
Double	4.60 (116.84)	5.31 (134.87)
Triple	6.17 (156.72)	6.88 (174.75)


(1) Single shaft or internal encoder.
(2) Control knob (max. torque 20 lb-in / 2.3 N-m).

Connector options




Pluggable interface version:
14-pin* and 2-pin locking wire crimp and
10-pin friction lock wire crimp connectors

* 14-pin replaced by 20-pin locking wire crimp
connector when optional remote encoder is
included

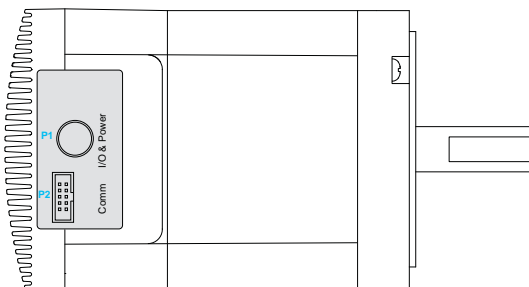

Flying leads interface version:
12" (305mm) flying leads with
10-pin non-locking IDC connector







Lmax2 option



MDrive® 34 Plus

Motion Control

fully programmable

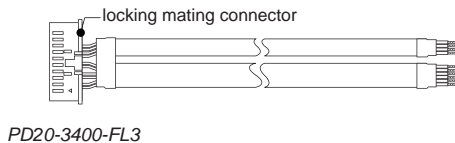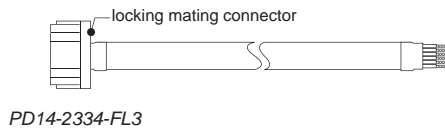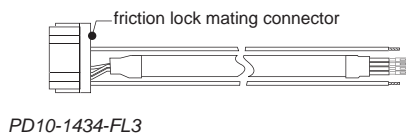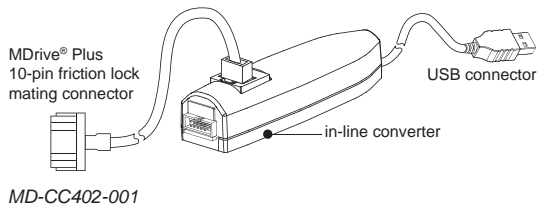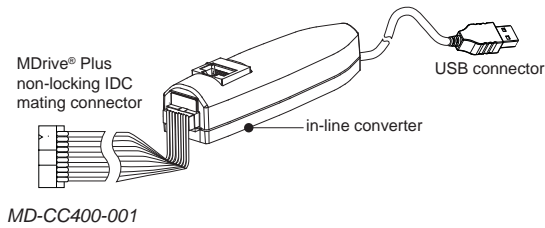

Installation accessories

Description	Length feet (m)	Part number
-------------	-----------------	-------------

QuickStart Kit

For rapid design verification, all-inclusive QuickStart Kits includes prototype development cables and a communication converter for MDrivePlus initial functional setup and system testing.

- For MDrive34 Motion Control products — add "K" to part number (1)

Communication converter

Electrically isolated, in-line converter pre-wired with mating connector to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port.

- | | | |
|--|------------|--------------|
| ■ Mates to 10-pin non-locking IDC connector | 12.0 (3.6) | MD-CC400-001 |
| ■ Mates to 10-pin friction lock wire crimp connector | 12.0 (3.6) | MD-CC402-001 |

Prototype development cable

Speed test/development with pre-wired mating connector with other cable end open.

- | | | |
|--|------------|---------------|
| ■ Mates to 10-pin friction lock wire crimp connector for communication | 10.0 (3.0) | PD10-1434-FL3 |
| ■ Mates to 14-pin locking wire crimp connector for I/O and optional internal encoder | 10.0 (3.0) | PD14-2334-FL3 |
| ■ Mates to 20-pin locking wire crimp connector for I/O and remote encoder option | 10.0 (3.0) | PD20-3400-FL3 |
| ■ Mates to 2-pin locking wire crimp connector for power | 10.0 (3.0) | PD02-3400-FL3 |

Mating connector kit

Connectors for assembly of cables, cable material not supplied. Sold in lots of 5. Manufacturer's crimp tool recommended for crimp connectors.

- | | | |
|---|---|-------|
| ■ 10-pin friction lock wire crimp connector for communication | — | CK-02 |
| ■ 14-pin locking wire crimp connector for I/O and optional internal encoder | — | CK-09 |
| ■ 20-pin locking wire crimp connector for I/O and remote encoder option | — | CK-11 |
| ■ 2-pin locking wire crimp connector for power | — | CK-05 |
| ■ 10-pin non-locking IDC connector for communication | — | CK-01 |

Drive protection module

Limits surge current and voltage to a safe level when DC input power is switched on-and-off to an MDrive Plus.

- | | | |
|--|---|-------|
| ■ For all MDrive34 Motion Control products | — | DPM75 |
|--|---|-------|


(1) See next page.

MDrive® 34 Plus

Motion Control


fully programmable

MDrive® 34 Plus
flying leads interface

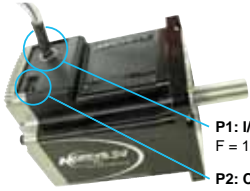

- P1: I/O & Power**
F = 12" flying leads
- P2: Communication**
D = RS-422/485 with 10-pin IDC non-locking connector
L = RS-422/485 with 10-pin friction lock wire crimp connector

MDrive® 34 Plus²
pluggable interface

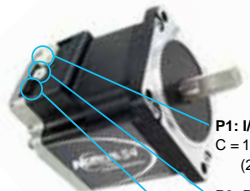

- P1: I/O, and optional remote encoder**
C = 14-pin locking wire crimp connector (20-pin with remote encoder option)
- P3: Power**
2-pin locking wire crimp connector
- P2: Communication**
L = RS-422/485 with 10-pin friction lock wire crimp connector

Part numbers

Example:	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
QuickStart Kit K = kit option, or leave blank if not wanted	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
MDrive Plus version MDI = Motion Control	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Input 1 = Plus, standard features 3 = Plus ² , expanded features	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
P1 connector F = flying leads (1) C = wire crimp (2)	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Communication R = RS-422/485	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
P2 connector D = IDC (1) L = wire crimp	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Motor size 34 = NEMA 34 (3.4" / 86 mm)	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Motor length A = single stack B = double stack C = triple stack	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Drive voltage 7 = +12 to +75 VDC	K	M	D	I	1	F	R	D	3	4	A	7	-EQ
Options Leave blank if not wanted Options may be combined, unless noted													-EQ
-EQ													= internal encoder, 512-line internal optical encoder with index mark
-EE													= remote encoder interface, differential encoder to be provided by user <i>Available with Plus² versions only. May not be combined with internal encoder option.</i>
-N													= rear control knob for manual positioning




(1) Only available with Plus products.

(2) Only available with Plus² products.

Motor specifications MDrive 34		Holding torque	Detent torque	Rotor inertia	Weight (motor + driver)
Motor stack length	Single	408.0 oz-in / 288.0 N-cm	10.9 oz-in / 7.7 N-cm	0.01275 oz-in-sec ² / 0.90 kg-cm ²	4.1 lb / 1.9 kg
	Double	574.0 oz-in / 405.0 N-cm	14.16 oz-in / 10.0 N-cm	0.01924 oz-in-sec ² / 1.35 kg-cm ²	5.5 lb / 2.5 kg
	Triple	1090.0 oz-in / 770.0 N-cm	19.83 oz-in / 14.0 N-cm	0.03849 oz-in-sec ² / 2.70 kg-cm ²	8.8 lb / 4.0 kg

Speed torque characteristics MDrive 34

Single stack length Double stack length Triple stack length

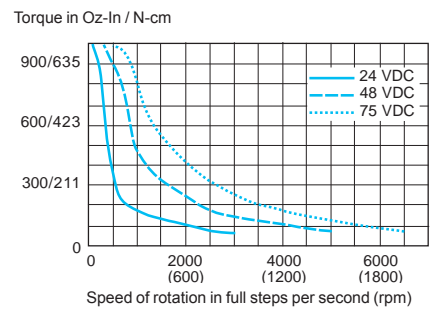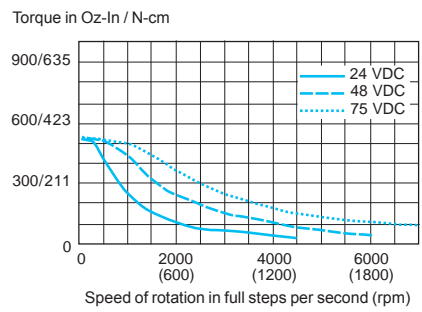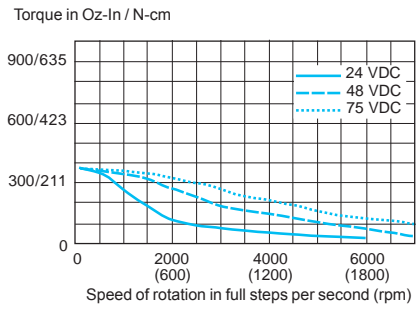

USA SALES OFFICES

East Region

Tel. 610-573-9655
e-mail: e.region@imshome.com

Northeast Region

Tel. 860-368-9703
e-mail: n.region@imshome.com

Central Region

Tel. 630-267-3302
e-mail: c.region@imshome.com

Western Region

Tel. 602-578-7201
e-mail: w.region@imshome.com

EUROPEAN SALES MANAGEMENT

Tel. +33/4 7256 5113 – Fax +33/4 7838 1537
e-mail: europa.sales@imshome.com

TECHNICAL SUPPORT

Tel. +00 (1) 860-295-6102 – Fax +00 (1) 860-295-6107
e-mail: etech@imshome.com

Schneider Electric Motion USA

370 N. Main Street
Marlborough, CT 06447 USA

www.motion.schneider-electric.com

Owing to changes in standards and equipment, the characteristics given in the text and images in this document are not binding until they have been confirmed with us.

Print: Schneider Electric Motion USA
Photos: Schneider Electric Motion USA